

# DSL USB Modem Quickstart Guide – WingNET Internet Services

For Zoom ADSL USB 5510

## A. Installation

1. Insert the supplied CD into your computer. The CD starts automatically and the "Main Menu" opens: (**Note:** If the CD does not start automatically, from the desktop, go to **Start | Run** and then type **D:setup.exe**, where **D** is the letter of your CD-ROM drive.)

2. Click the **ADSL** Modem Installation Wizard button.

3. Click the **USB** option.


4. You may see the following warning message. Please click "Continue Anyway."



5. Please follow the rest of the prompts to finish the installation.

## B. Setup

1. Connect the USB cable and the phone cord. Plug the included dual DSL filter that has both a phone and a DSL port into your wall jack. Run the phone line from the DSL jack on the filter to the Phone In port of your modem (see diagram below).

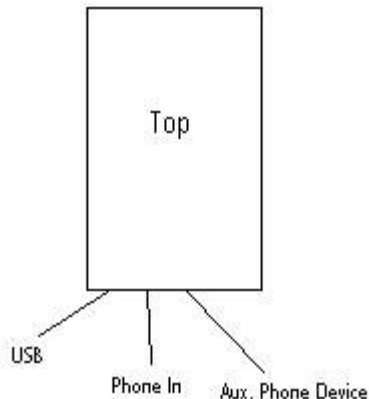

2. Once the installation is complete, you will see a Zoom icon on your desktop. Double-click it to display the Network Password dialog box. Enter "admin" as the user and "zoomadsl" as the password.

3. On the "Basic Setup" page, enter your username as [username@wingnet.net](mailto:username@wingnet.net).

4. Enter your password.

5. Click "Save Changes," then click "Write Settings to Flash and Reboot" to complete the setup.

\*DSL filters will need to be placed on each telephone device in your house. This helps keep DSL signals separate from your voice signals. For more information about your modem, please consult the manual that came with your USB modem.